



INSTALLATION MANUAL

23176

Level of Difficulty

Easy

Installation difficulty levels are based on time and effort involved and may vary depending on the installer level of expertise, condition of the vehicle and proper tools and equipment.

Parts List

Item	Qty	Description
1	1	Locking slide
2	1	Adjustment Side
3	1	Dust cover
4	4	Nylock nut, M8 – 1.25
5	4	Carriage bolt, M8 – 1.25 x 20mm, CL 8.8

Tools Required

Wrench, 13mm included	--
-----------------------	----

* For a tools reference guide visit curtmfg.com/trailer-hitch-installation

Product Registration and Warranty

CURT stands behind our products with industry-leading warranties. To get copies of the product warranties, register your purchase or provide feedback, visit: warranty.curtgroup.com/surveys

WARNING

Never exceed the vehicle manufacturer's recommended towing capacity.

Product Photo



NOTICE

Visit www.curtmfg.com for a full-color copy of this instruction manual, as well as helpful videos, guides and much more!

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

Periodic inspection of the trailer hitch should be performed to ensure all mounting hardware remains tight and structural components are secure.

To help prevent damage to the product or vehicle, refer to the specified torque specifications when securing hardware during the installation process.

SAFETY INSTRUCTIONS

Safety glasses should be worn at all times while installing this product.

INSTALLATION

Step 1

Unlock the mechanism and install the two halves around the wheel.



Step 2


Slide the two halves together around the tire until it is snug and push in the lock mechanism.



LENGTH ADJUSTMENT

Step 1

Loosen the bolts and extend the arm. Both bolts must engage the arm for optimal security.

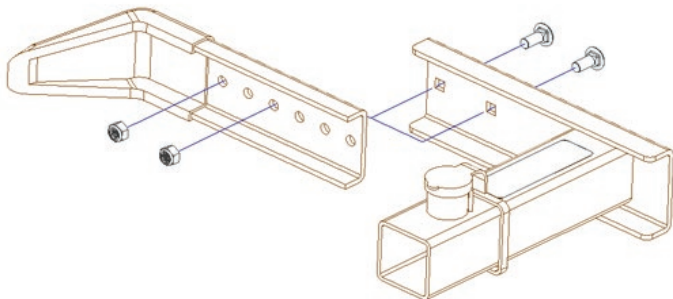

Step 2

Torque all the bolts to 18 in-lb.

