

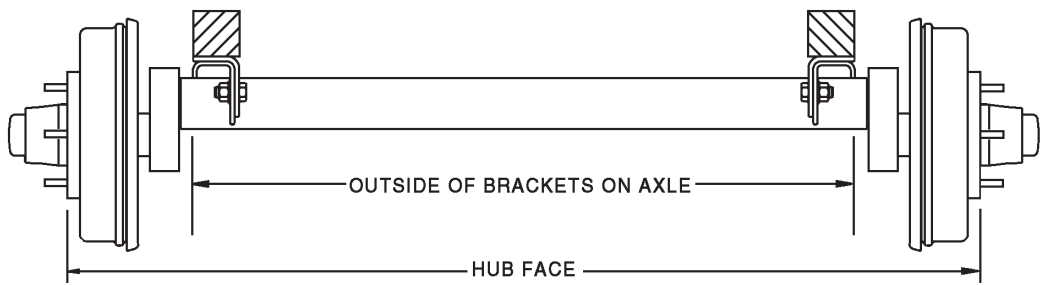


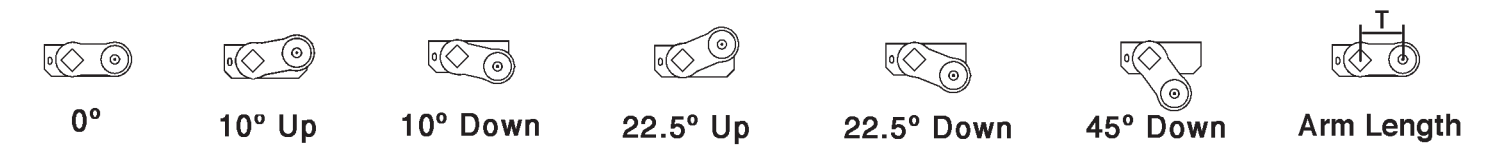

TORFLEX AXLE Order Form

Date: _____

- Torflex Series (circle one): **#8** (.6k-1.1k) **#9** (1k-2.2k) **#10** (2.5k-3.5k) **#11** (3.6k-6k) **#12** (5.5k-7k)
#12V (5.5k-7.2k) **#13** (8k) **#13G** (9k-10k) **#13D** (10k) **#14** (12k)
- Rubber Content (weight capacity you desire): _____
- Brake Size: _____
- Cambered / Not Cambered / V-Bend (circle one)
- Beam Only or Idler or Brakes (circle one)
- Flanges: Yes _____ No _____ # of Holes _____
- Brake Type (circle one): Electric (Standard or Nev-R-Adjust) or Hydraulic (Uni-Servo, Duo-Servo, Free Backing or Disc)
- Bolt Pattern of Hub: _____ Inner Bearing: _____ Outer Bearing: _____
- Stud Size (circle one): 1/2" - 9/16" - 5/8"; if Wheel Nuts are 5/8" (circle one) Cone or Flanged Nuts
- Spindle Type (circle one): Grease / Oil / EZ Lube / Nev-R-Lube / Removable
- Spindle Length (A): _____
- Side Mount Brackets Needed: Yes _____ No _____ **Note:** side mount bracket is welded to bottom of frame then axle is bolted on.
- Hub Face Measurement : _____
- Length of Trailing Arm (T): _____
- Outside Bracket Measurement: _____
- Bracket Profile (circle one): Low / High / 3"
- Bracket Orientation (circle one): Inboard / Outboard
- Starting Angle: _____
- Axle Bracket Size (L): _____ (W): _____
- Axle Tube Size: _____

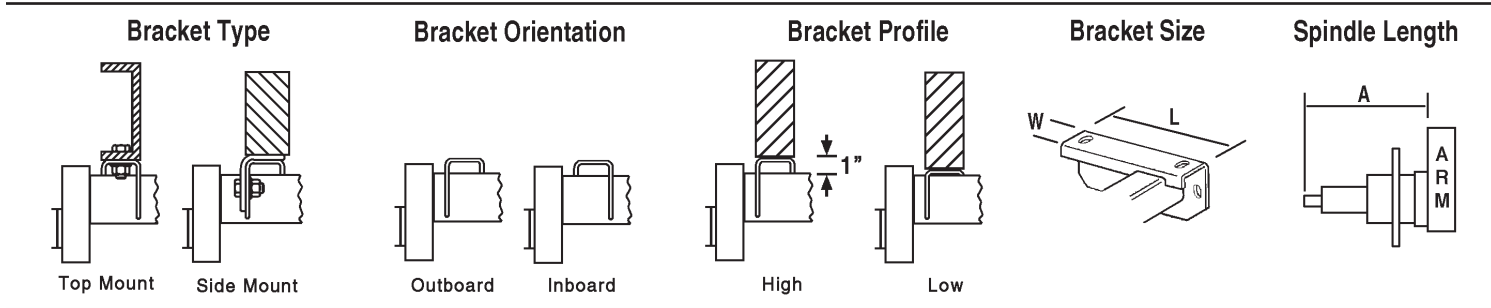

These axles are special order, shipped direct to customer from the manufacturer with the customer's specifications thus making them non-returnable.

Company Name: _____ Contact Name: _____

Phone No.: _____ Fax No.: _____

*Axle **will not** be ordered until all information above is provided and form signed below.*

Signature: _____ Date: _____





TORFLEX AXLE Series Information

SERIES	8	9	10L	10	11	12	12V	13	13G	13D
Capacity	600-1,100	1,000-2,200	2,500-3,000	2,500-3,500	3,600-6,000	5,500-7,000	5,500-7,200	8,000	9,000-10,000	10,000
Bracket Length	10	10	10	10	11	12	12	13	13	13
Bracket Width	2	2	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Tube Size	1.75	2.17	2.62	2.62	3.03	3.5	3.5	3.88	3.88	3.88
Standard Spindle Length	11.5"	12.5	Standard Only	Standard Only	14.5	Standard Only	17.5	17.5	Standard Only	Standard Only
Short Spindle Length	9"	11.5	N/A	N/A	13.5	N/A	16.5	16.5	N/A	N/A
Possible Profiles	Low only	Low, High 3"	Low, High 3"	Low, High 3"	Low or High	Low or High	Low or High	Low or High	High Only	High Only
Brake Size	7" x 1-1/4" Electric 7" x 1-3/4" Hydraulic	7" x 1-1/4" Electric 7" x 1-3/4" Hydraulic	10" x 1-1/2"	10" x 2-1/4"	12" x 2"	12" x 2"	12-1/4" x 2-1/2"	12-1/4" x 3-3/8"	12-1/4" x 3-3/8"	12-1/4" x 4"
No. of Brake Flange Holes	4	4	4	4	5	5	4	4	7	7
Standard Bearing	Inner L44649 Outer L44649	Inner L44649 Outer L44649	Inner LM67048 Outer L44649	Inner L68149 Outer L44649	Inner 25580 Outer LM67048 15123	Inner 25580 Outer 14125A	Inner 25580 Outer 02475	Inner 25580 Outer 02475	Inner 387A Outer 25580	Inner 395S Outer 387A
Bolt Patterns	4 on 4 5 on 4.5	4 on 4 5 on 4.5	5 on 4.5	5 on 4.5 5 on 4.75 5 on 5 5 on 5.5 6 on 5.5	6 on 5.5	8 on 6.5	8 on 6.5	8 on 6.5	8 on 6.5	8 on 6.5

BRAKE TYPES: ELECTRIC: Standard, Standard with Parking Feature or Nev-R-Adjust

HYDRAULIC: Uni-Servo, Uni-Servo with Parking Feature, Duo-Servo, Free-Backing or Disc

Croft Trailer Supply, Inc. Distribution Center

P.O. Box 300320 • Kansas City, MO 64130-0320 • 816-861-1001 • Fax 816-861-1881 • www.crofttrailer.com