




Doing Our Best to Provide You the Best


HJ20007, Rev 0
01/26

MOLLE GRID SYSTEM MOUNTS FOR RAM 2500 - 3500 8554003

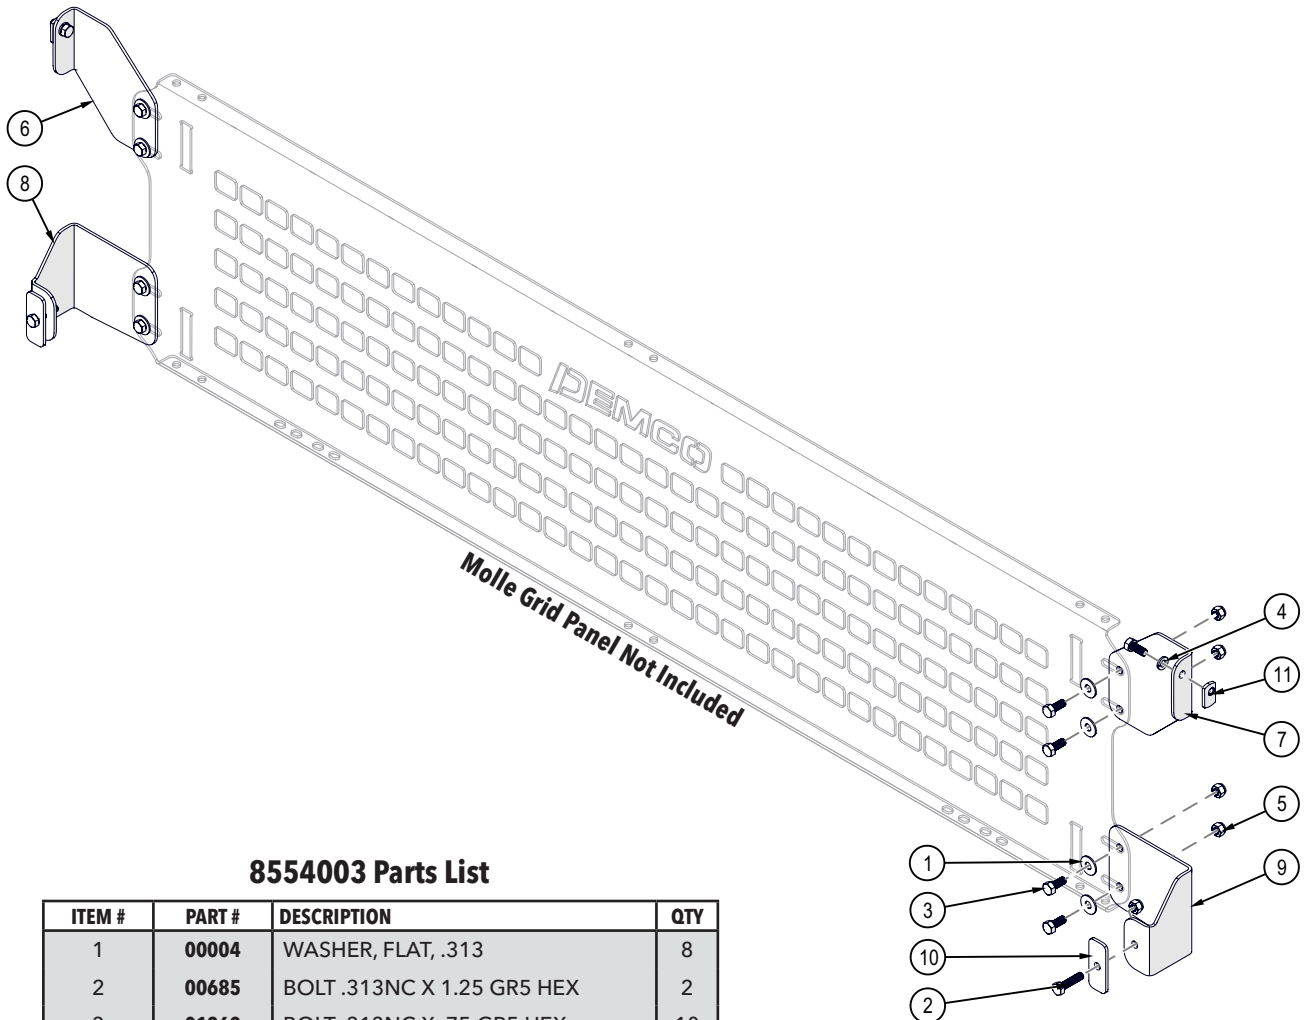


8554003 Parts List


ITEM #	PART #	DESCRIPTION	QTY
1	00004	WASHER, FLAT, .313	8
2	00685	BOLT .313NC X 1.25 GR5 HEX	2
3	01263	BOLT .313NC X .75 GR5 HEX	10
4	01997	WASHER, SPRING LOCK .313	2
5	02802	NUT, .313 NC NYLON LOCK	10
6	18723	MOUNT PLATE	1
7	18724	MOUNT PLATE, RIGHT	1
8	18725	MOUNT PLATE, LOWER LEFT	1
9	18726	MOUNT PLATE, LOWER RIGHT	1
10	18727	CLAMP PLATE	2
11	18836	.313 THREADED SS PLATE	2

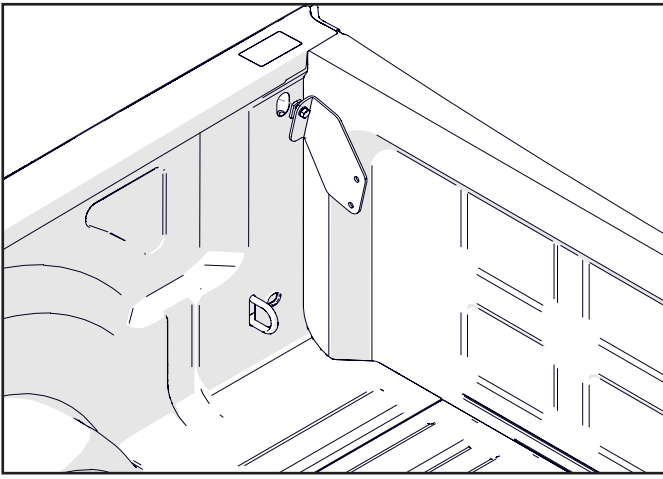

1. Install the 5/16" bolt, lock washer and the threaded plate loosely to the upper mounts. Insert the threaded plate into the upper box hole. Tighten enough to hold mounting plate.

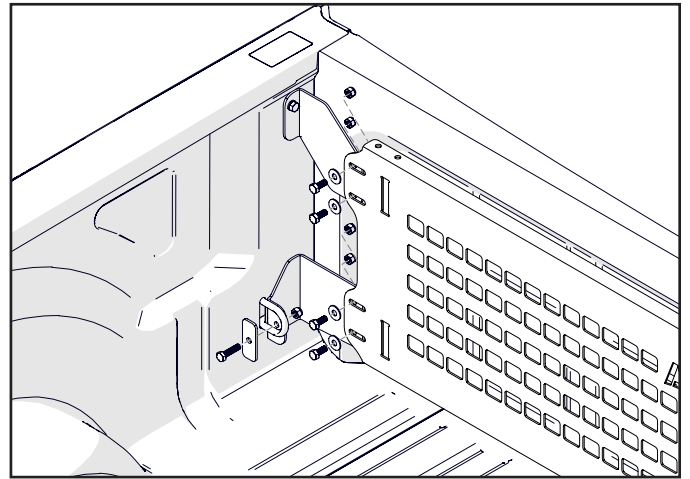

2. Fasten molle grid to the box mounts using the 5/16" bolts, flat washers and nuts, as shown above. Always put washers on the slotted holes. Installing top mount first may help in holding molle grid in place. Fasten bottom mount to truck bed loop using the clamp plate, 5/16" bolt and nut.

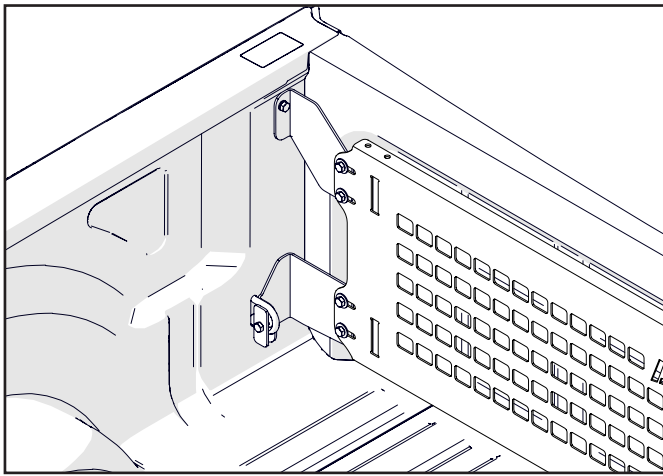

3. Once everything is in position, tighten all fasteners to 18 ft/lbs.